


QRF300C Quick Guide



V1.0.0.1

Parts Identification

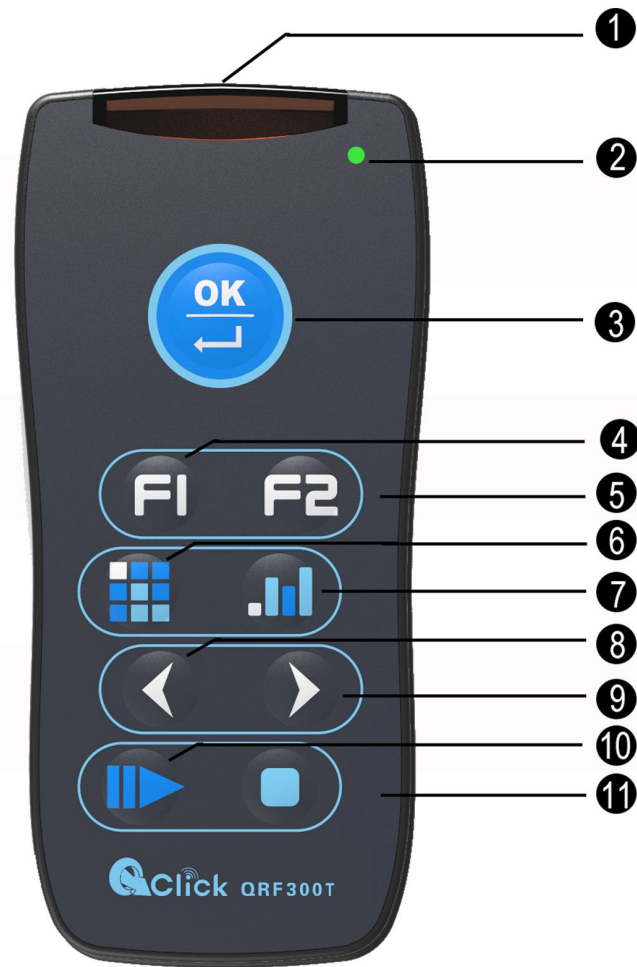

1. Transmission window, it is used to transmit RF signal.

2. Indicator light

3. OK

4. "F1" function button

5. "F2" function button

6. "Report", it is used to display the Score Board.

7. "Result", it is used to display histogram of results.


8. "Up" is used to control the presentation of PPT slides: page-up.

9. "Down" is used to control the presentation of PPT Slides: page-down.

10. "Start" and "Pause", it is used to start gathering the response information of the audience remotes; when pressed again, and it will be used to pause the timer while the receiver continues to gather information.

11. "Stop", it is used to stop gathering the response information from the participants remotes.

Parts Identification

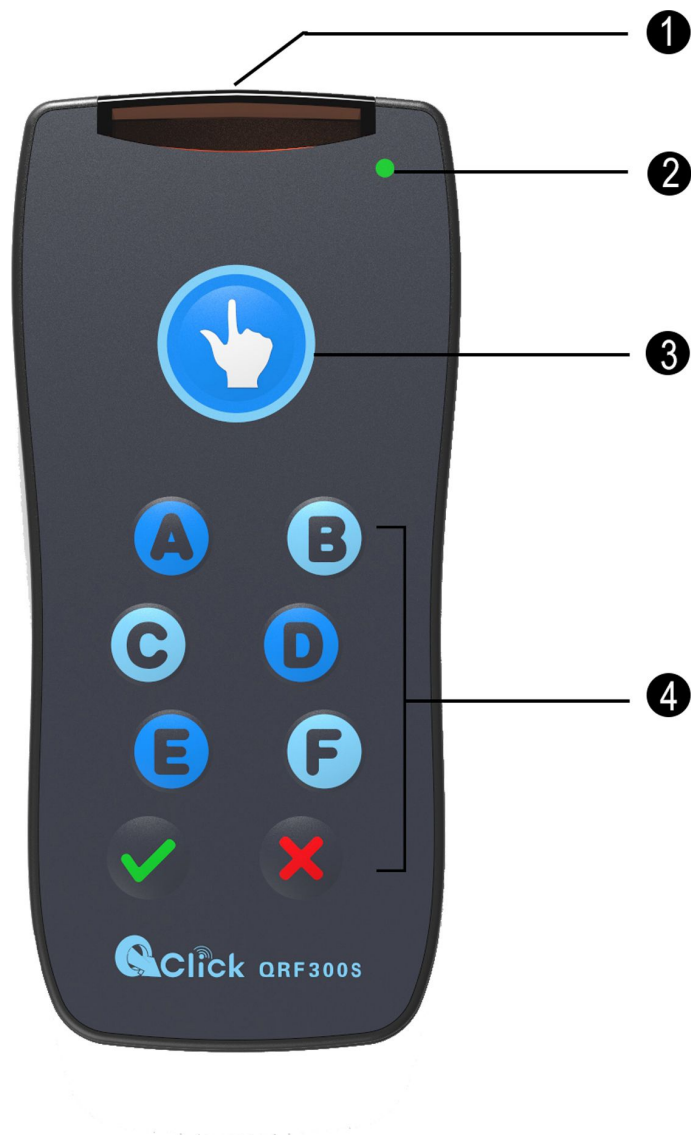

1. Transmission window

2. Indicator light

3. Button for "Rush Quiz" activity mode

4. Choice buttons, labeled "A" to "F"、"✓" or "x"

Introduction to the QRF300C audience response system

1、 Remotes and Dongle

Load two “AAA” batteries into the Instructor and Student remotes.

2、 Start the Software

a. Install the QClick software from the USB flash disk.

b. Plug in the USB dongle which should be automatically recognized by QClick.

*Note: The default username and password are both qomo.

3、 Prepare an Exam

a. Select a question type from the Add a Question section, and click a selection from the option menu to add a template slide. You can add slides through PPT.

b. Click Show Details on the Question Setting section.

c. Set the question properties from the dropdown list, such as Question Mode, Quiz Timer, and Points.

d. Type your question and answer choices in the template. In the Question Detail section, click Obtain to display the text and answers in the Question Detail fields.

e. Set the correct answer by clicking the check box of answer options under Answers.

4、 Class Set Up

a. Click the Class button in the Tools section.

b. Click the shortcut keys in the Class Setting window to add a class, edit a class, or delete a class. Or, set up the class by clicking the Class option menu.

c. Click the shortcut keys in the Class Setting window to set up student profiles. Or, set up student information by clicking on Student in the option menu.

d. Click the Save button to complete class settings, and then exit the class setting window.

5、 Import a Class

a. Click on File and select Import Class List from the option menu. Or simply click the button on the shortcut keys.

b. Find the Excel file with your class list and click Open.

c. Select the correct title for your imported columns from the drop down menus above the mock Excel sheet.

d. Click the Import button to begin the import.

*Note: The class you import from Excel must have three columns of set information filled out: the Student ID, First Name, and Last Name.

6、 Run a Quiz

a. Click the Start button in the Tools section to choose a quiz mode. A quiz setting window will pop up.

*Note: The QClick toolbar will appear and shows “QRF300C Connected”. If the toolbar shows “No Host” re-plug the USB dongle.

b. Select a class from the drop-down list in the quiz setting window.

c. Click the check boxes necessary for your session.

d. Click Start to run the quiz.

e. You can operate your exam by the toolbar during exam.

7、 Tools

a. Class-Manage students information.

b. Report-Check the exam result and analysis.

c. Setting-Set QClick and hardware information.

d. Database-Backup or recover user account.

e. Help-User Manual, Training video and support.